
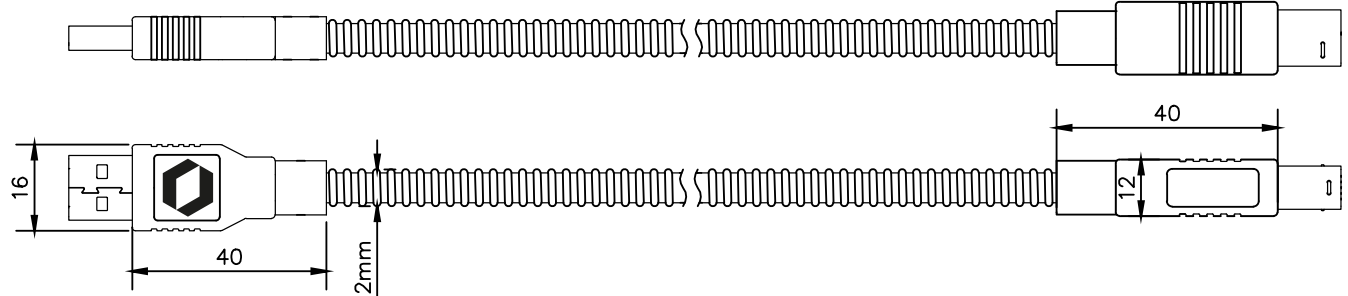

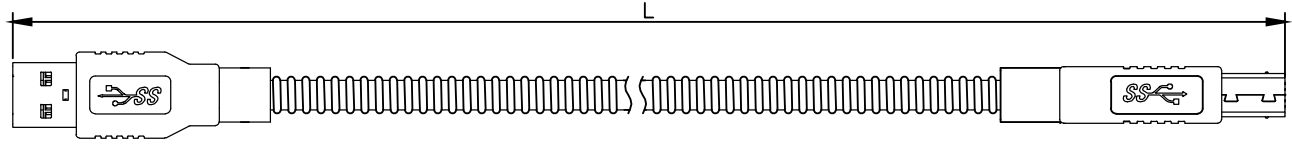


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E

A  
B  
C  
D  
E



WIRING MAP

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

PRODUCT NUMBERING

L=

4053-0.2-X	200±20mm
4053-0.5-X	500±20mm
4053-1.0-X	1000±20mm
4053-1.5-X	1500±20mm
4053-2.0-X	1500±20mm

ELECTRONIC TEST:  
 1.ALL CABLE 100% TEST,WITHOUT ANY  
 OPEN CIRCUIT/SHORT CIRCUIT/MISMATCH  
 2.RESISTANCE:2 ohm Max.  
 3.I.RESISTANCE: 20M ohm Min.  
 4.HI-POT: 300V DC/10ms

NO	DESCRIPTION	QTY
1	USB3.0 SERIES"A"PLUG	1PC
2	USB3.0 SERIES"B"PLUG	1PC
3	UL2725(28AWG*1P+EAM)*2+28AWG*1P+24AWG*2C +AEB OD:6.5mm PVC	1PC
4	Stainless steel protective jacket	1PC

Intona Technology GmbH  
 Auweg 32, 89250 Senden, Germany

APPROVALS		DATE		CATEGORY											
DRAWN BY shenxin		2019.11.26		Industrial USB 3.0 Cable											
CHECKED BY Carl		2019.11.26		PRODUCT DESCRIPTION Rugged, triple shielded stainless steel amored											
APPROVED BY Carl		2019.11.26													
TOLERANCES (UNLESS SPECIFIED)				<table border="1" style="font-size: small;"> <tr> <td>0.±0.25</td> <td>0."±2"</td> </tr> <tr> <td>.0±0.20</td> <td>.0"±1"</td> </tr> <tr> <td>.00±0.10</td> <td>.00"±0.5"</td> </tr> <tr> <td>.000±0.05</td> <td>.000"±</td> </tr> </table>				0.±0.25	0."±2"	.0±0.20	.0"±1"	.00±0.10	.00"±0.5"	.000±0.05	.000"±
0.±0.25	0."±2"														
.0±0.20	.0"±1"														
.00±0.10	.00"±0.5"														
.000±0.05	.000"±														
UNITS: mm		SIZE A4	FSCM NO.	DWG. NO. U4353	REV. A										
SCALE:				SHEET: 1/1											

1 2 3 4 5 6 7 8